


CONCRETE THICKNESS SCHEDULE		
DRIVEWAY	THICKNESS	AREAS
COMMERCIAL	8"	APRON, BLV. SLAB, SIDE-WALK.
RESIDENTIAL	6"	APRON, BLV. SLAB, SIDE-WALK.

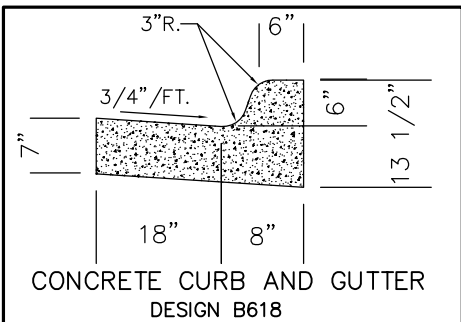

- NOTES:
1. CONCRETE CURB TO BE POURED INTEGRAL WITH APRON, MAX 5% CROSS SLOPE ON COMMERCIAL APRONS.
 2. CONCRETE TO BE MnDOT 3F52 MIX DESIGN WITH 6% ± 1% AIR CONTENT.
 3. MEMBRANE CURING COMPOUND SHALL BE CLEAR TK2519 DCWB, AMS 3754 CLEAR OR APPROVED EQUAL.