

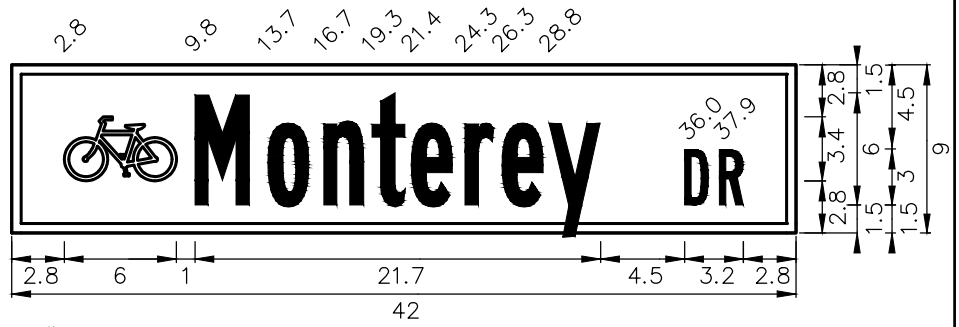


BRACKETS—TOP VIEW

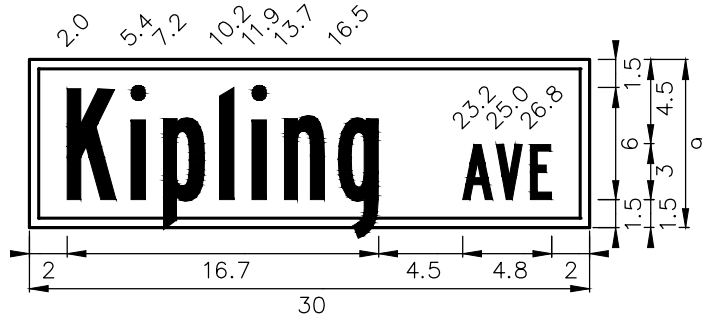


0.5" Border, White on Green;
"Monterey DR", B 2K;

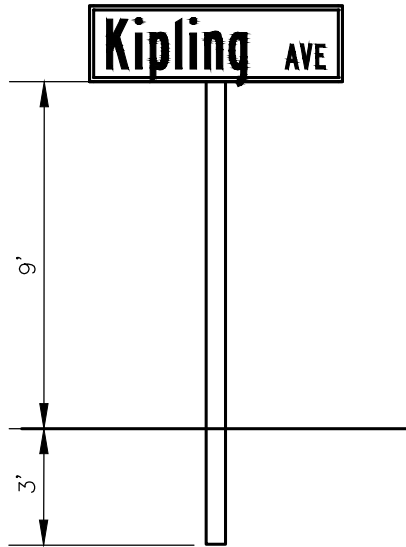

0.5" Border, White on Green;
"Kipling AVE", B 2K;

- SUFFIX ABBREVIATIONS
- STREET - ST
 - AVENUE - AVE
 - LANE - LN
 - CIRCLE - CIR
 - BOULEVARD - BLVD
 - DRIVE - DR
 - PLACE - PL

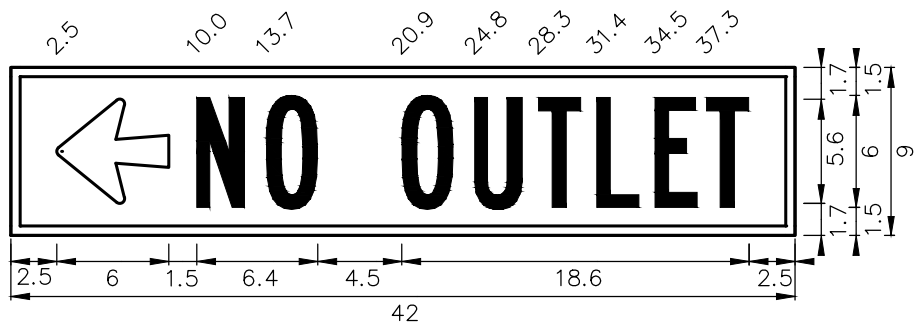

0.5" Border, Black on Yellow;
Arrow 1 - 6.0" 180?; "NO OUTLET", B 2K;

NOTES:

1. SIGN BLADE SIZE IS 9" AND IS MADE OUT OF EXTRUDED ALUMINUM AND HAS SQUARED CORNERS.
2. MAXIMUM SIZE OF BLADE LENGTH IS 60".
3. BLADES SHALL BE DOUBLE FACED AND ATTACHED TO A BRACKET.
4. LETTER SIZE IS 6" UPPER CASE & 5" LOWER CASE FOR STREET NAME ON 9" BLADES, 3" UPPER CASE FOR SUFFIX ON 9" BLADES, 6" NUMBERS ON 9" BLADES.
5. THE FONT TO USE FOR LETTERING IS SERIES B.
6. SIGNS SHALL BE CONSTRUCTED WITH HIGH INTENSITY PRISMATIC (HIP) SHEETING. USE MNDOT GREEN BACKGROUND FOR PUBLIC STREETS AND MNDOT BLUE BACKGROUND FOR PRIVATE STREETS.
7. A BIKE SYMBOL WILL PRECEDE THE STREET NAME ON BLADE IF STREET INCLUDES A BIKE FACILITY.
8. STREET NAMES SHALL BE SPELLED COMPLETELY EXCEPT FOR SUFFIXES.
9. SHOP DRAWINGS FOR STREET BLADE BRACKETS SHALL BE APPROVED BY CITY STAFF PRIOR TO IMPLEMENTATION IN THE FIELD.
10. SIGN POST SHALL BE 2 3/8" O.D. X 12' LONG GALVANIZED ROUND TUBE AND INSTALLED WITH BREAKAWAY SLEEVE IN CONCRETE.
11. A SIGN PLAN SHOWING SIGN COLORS, SIZES AND LETTERING MUST BE SUBMITTED TO THE CITY FOR REVIEW AND APPROVAL.
12. SEE CITY SPECIFICATIONS FOR MORE DETAILS ON MATERIALS AND LAYOUT.
13. PERMANENT SIGNS SHALL BE PLACED SUCH THAT OBSTACLES DO NOT BLOCK THEM FROM BEING VIEWED BY APPROACHING ROAD USERS, OBSTACLES MAY INCLUDE, BUT ARE NOT LIMITED TO, LIGHT POLES, TREES, SIGNS, AND BUILDINGS.